




## PERFORATED PANEL SH

**Ultimate Load** 2400 kgf, 3300 kgf

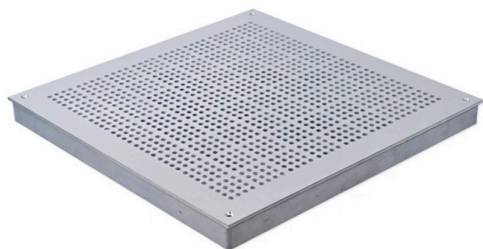

Perforated panels designed specifically for Clean Room applications: they are designed to provide a smooth air flow from the ceiling to the floor thru 1.024 chamfered holes.

---

**SKU:** N/A



# PRODUCT DESCRIPTION

## SH648F1

### Key Features

- Dimensions: 600x600x50(T) - (2mm tile included)
- Finish Type: PVC Tile
- Weight: 9,8 kg

### Loading Test

- Ultimate Load: 2.400 kgf (Center point)
- Concentrated Load: 950 kgf (2mm, Center point)
- Concentrated Load: 1.450 kgf (3mm, Center point)

### Conductivity Standard

- Electrical Resistance (EC):  $2,5 \times 10^4 \sim 1,0 \times 10^5 \Omega$
- Electrical Resistance (SD):  $1,0 \times 10^5 \sim 1,0 \times 10^6 \Omega$



## SH648F2

### Key Features

- Dimensions: 600x600x50(T) - (2mm tile included)
- Finish Type: PVC Tile
- Weight: 11,7 kg

### Loading Test

- Ultimate Load: 3.300 kgf (Center point)
- Concentrated Load: 1.470 kgf (2mm, Center point)
- Concentrated Load: 1.950 kgf (3mm, Center point)

### Conductivity Standard

- Electrical Resistance (EC):  $2,5 \times 10^4 \sim 1,0 \times 10^5 \Omega$
- Electrical Resistance (SD):  $1,0 \times 10^5 \sim 1,0 \times 10^6 \Omega$