



## CEILING LIGHT - TEARDROP



**Teardrop**

Central, Initial, Single

Aerodynamic ceiling lights especially conceived for Clean Rooms and Laminar Air Flow Systems: their width (50 mm) and the special shape of the screen allow an excellent airflow control without turbulence. Teardrop ceiling lights are constructed to enable the creation of rows of lights.

---

**SKU:** N/A




# PRODUCT DESCRIPTION

## Technical Data


IP58

- **Dimensions (AxBxH):** 1526x50x125
- **Feeding voltage:** 240Vca 50Hz
- **Protection degree:** IP40
- **Power:** 58
- **Weight (Kg):** 3,5


## Photometric Curves

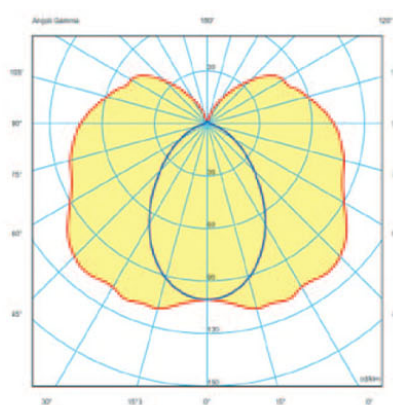

18W

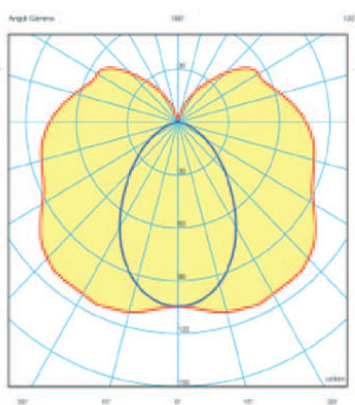

36W

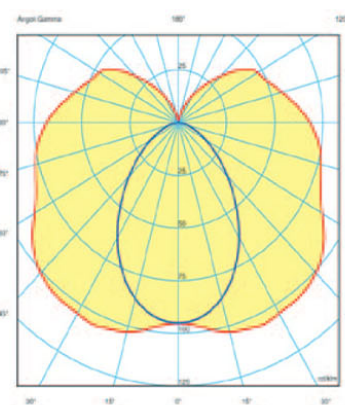

58W



## Applications

Cleanrooms and Laminar Flow Systems for the Semiconductor, Electronic, Optical, Mechanical, Aerospace, Pharmaceutical, Medical and Hospital industries.

## Components' description

### Screen

made of transparent polycarbonate characterised by a good flexibility, an optimum mechanical resistance and a good fire resistance.

### Roof tile

made of extruded aluminium profile;

### Lamp holder

made of extruded aluminium profile;

### Electronic ballast

### Incorporated phase selector

that allows for subdividing a row  
of ceiling lights on two different ignition switches in order to  
ensure the best load distribution;

### Fuse

for protection of each single ceiling lamp.

### Optional components

- Special wiring for high rows creation male / female;
- Wiring for the use of LED tubes.

